

Sintering of single anterior crowns
in as little as 90 minutes



TOTAL DIGITAL CAD/CAM
DENTAL SOLUTIONS

YRC-F10+

sintering furnace



Excellent in quality, Easy operation
with touch- screen technology.




High process reliability due to constant
temperature control. Non-microwave
heating, stable performance.



Perfect sintering effect. Large capacity,
two layers sinterable at one time.

Fast and slow integrated
sintering furnace

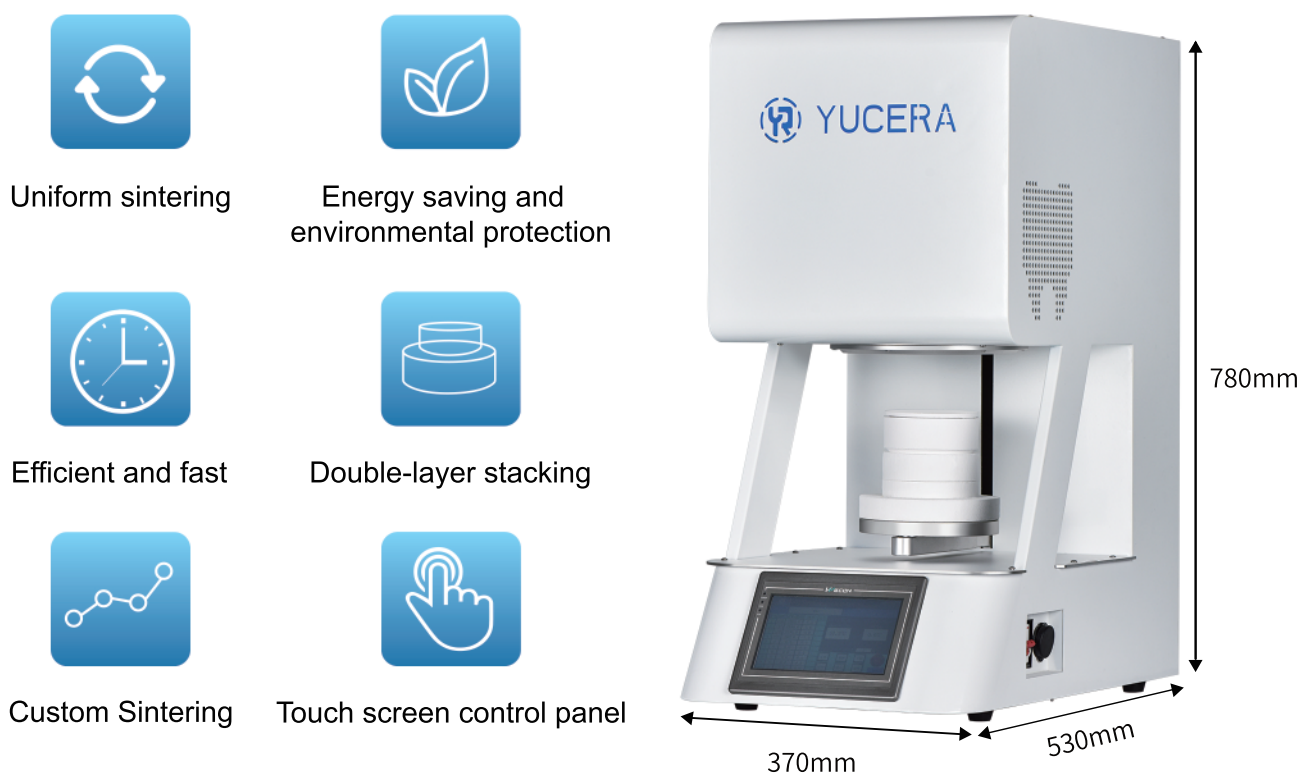

PACKING CONFIGURATION LIST



Crucible pliers
Quick burning
crucible fork




Sintered bead



hearth



Zirconia slow
burning crucible



Special fast
burning crucible



Power cable

PRODUCT PARAMETERS

Specification	Parameter	Specification	Parameter
Temperature control accuracy	$\pm 1^{\circ}\text{C}$	Maximum temperature	1560°C
Touch screen size	7" true color	Operating temperature	$\leq 1550^{\circ}\text{C}$
Rated power	$\leq 2\text{KW}$	Furnace size	$\varnothing 110\text{mm} \times 130\text{mm}$
Number of programs	24 programs	Equipment size	$370 \times 530 \times 780\text{mm}$
Sensor type	platinum rhodium S type double	Equipment weight	about 50KG