


ACF high speed film

ACF high-speed film with less tripping force, smooth surface with less laminated striation.

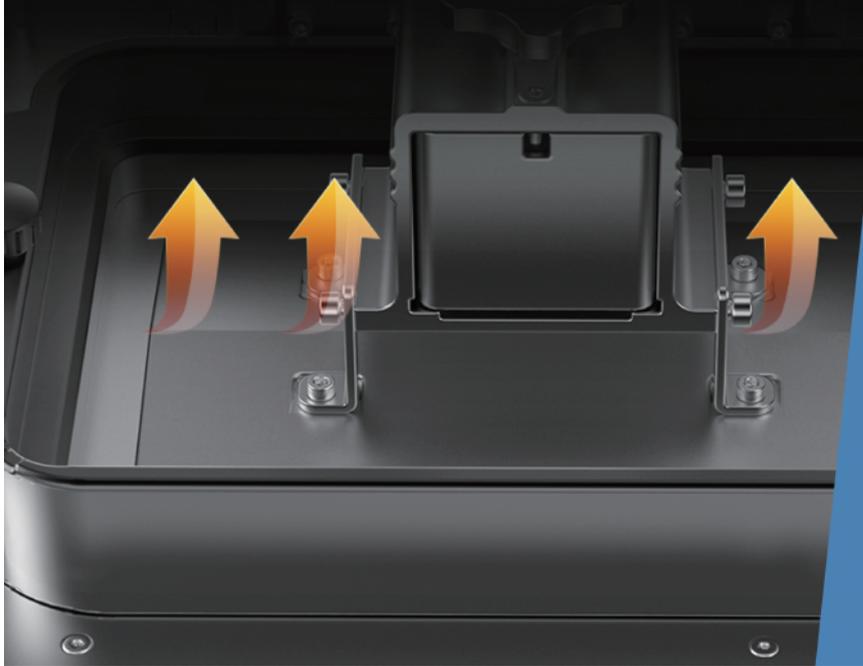

TOTAL DIGITAL CAD/CAM
DENTAL SOLUTIONS

DJ89Plus|8K

DEDICATED FOR
CHAIRSIDE &
DENTURE FACTORY

Break through limitations
Reconstruct imagination



Capture
Data

Interior
Lab Design

YUCERA
3D Print


Deliver





Common equipment printing


DJ89Plus dental 3D printer printing

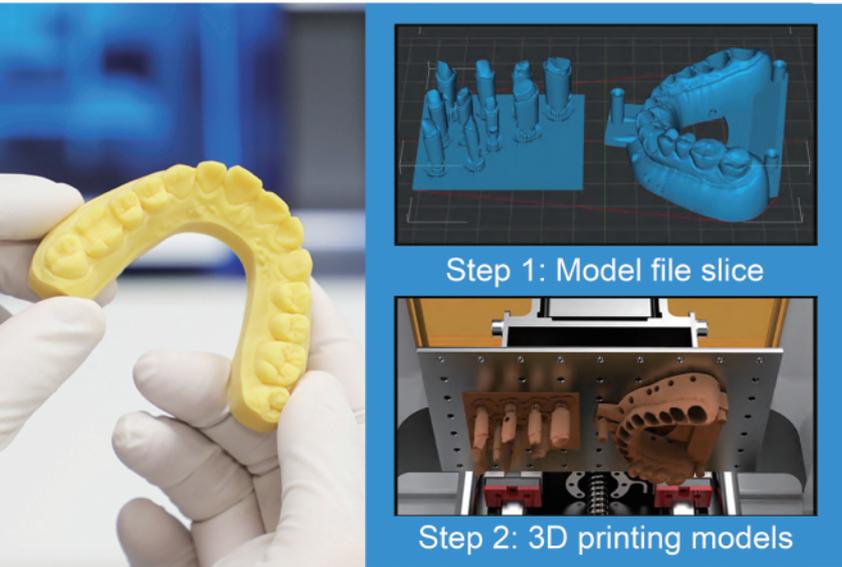

Step 1: Model file slice

Step 2: 3D printing models

- Automatic feeding
- Molding chamber heating (20-45°C)
- Screen resolution 10.3" 8K 7680*4320
- Printing size 228X 120X 100mm
- High speed release film
- XY axis accuracy 29μm

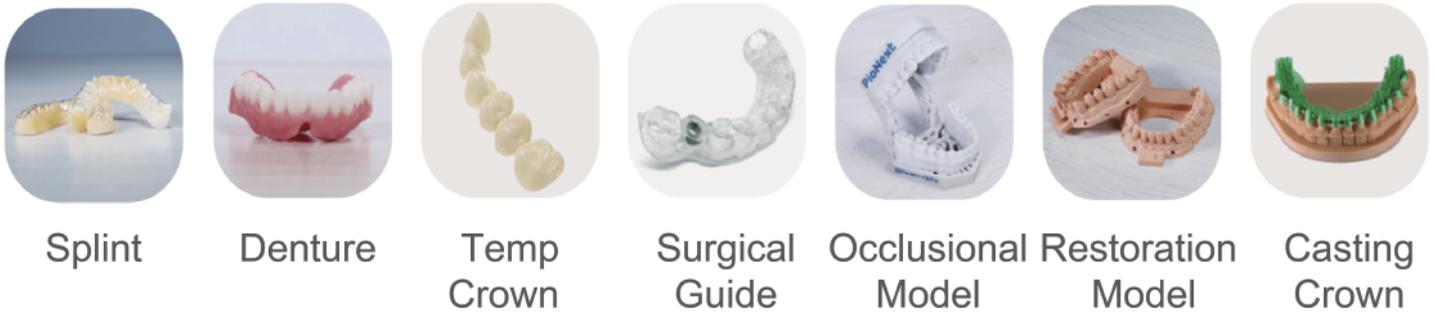

Splint

Denture

Temp Crown

Surgical Guide

Occlusional Model

Restoration Model

Casting Crown

DJ89 PLUS Parameters

Printing size	228X 120X 100mm	Z axis	Dual linear guide + Ball screw
Machine size	340X292 X 552mm	LCD screen life	2000h
Packing Size	605X380 X 660mm	Anti-aliasing	8 times anti-aliasing
XY axis accuracy	29μm	Automatic leveling	support
Printing Speed	40-60mm/h	Automatic feeding	support
Printing Layer thickness	0.01-0.1mm	Language	Support 12 languages, priority on Chinese and English
Touch Screen	5.0 Inch Full color touch screen	Support system	Windows7/8/10 X64, MAC, OS
Support consumable types	405nm dental, jewelry, washing and other photosensitive resin	Molding chamber heating	support(Temperature range 20-45°C)
Resolution	7680*4320		